


C-SERIES VS. B-SERIES

Choose the high-speed saw head that best fits your needs

C-SERIES

The Arms-Up Design

*Best for ease of accumulating small wood
and faster cycle times*

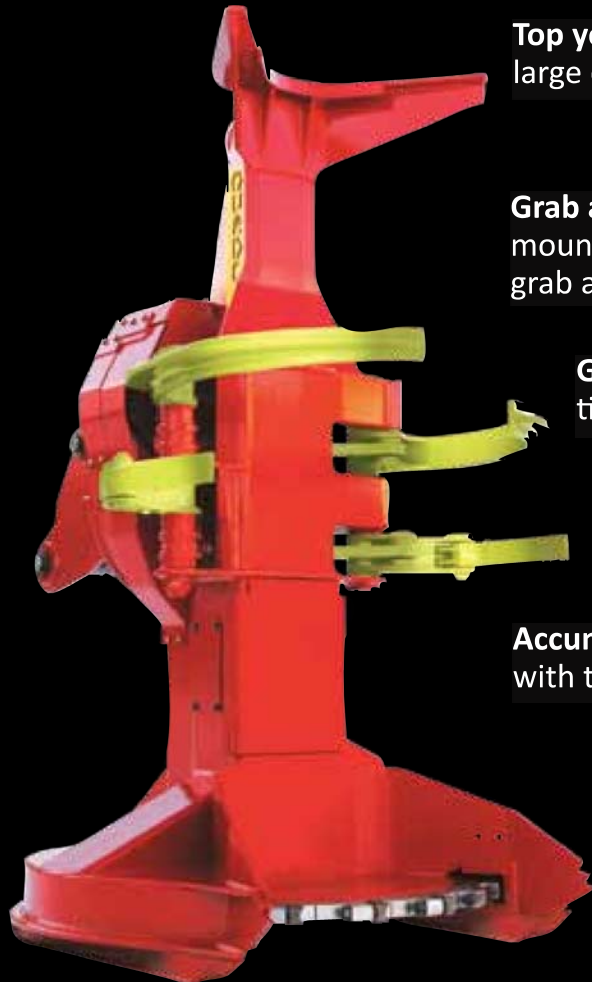

Top yoke Contoured to hold large quantities of small trees

Grab and accumulator arms mounted high on head for grab and go capability


Grab arms 1 cylinder with timing link

Accumulator arms 1 cylinder with timing link

B-SERIES

The Arms-Down Design

*Best for big wood and maximum
holding power*

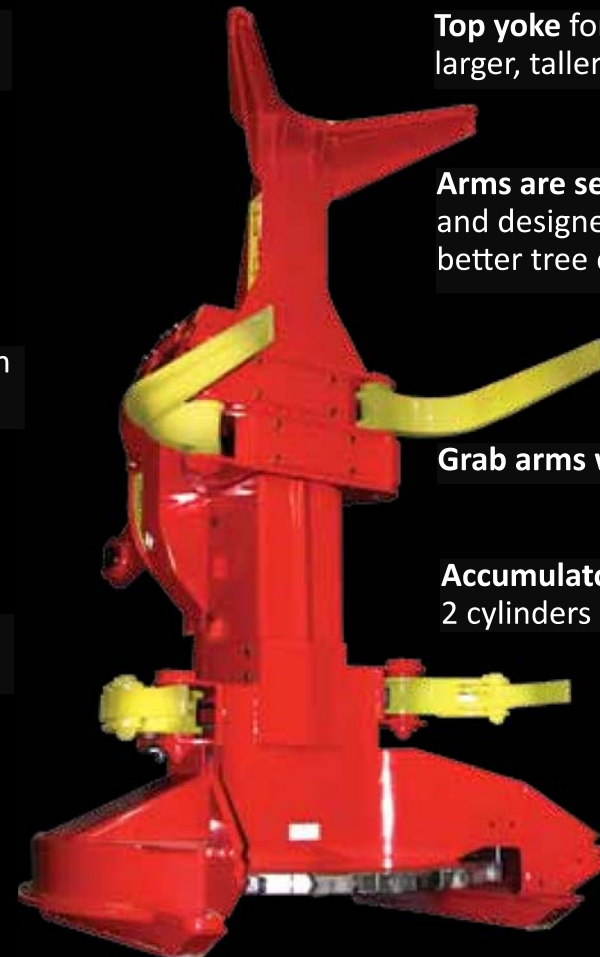

Top yoke formed to handle larger, taller trees

Arms are separated and designed for better tree control

Grab arms with 2 cylinders

Accumulator arms with 2 cylinders

QUADCO

www.quadco.com • 800.668.3340

C-SERIES VS. B-SERIES

C-SERIES <i>The Arms-Up Design</i>	B-SERIES <i>The Arms-Down Design</i>
Available Sizes	Available Sizes
<ul style="list-style-type: none"> • 18C - 18"(457mm) cut 3.0ft²(.28m²) accumulation area 	<hr/>
<hr/>	<ul style="list-style-type: none"> • 20B - 20"(508mm) cut 4.0ft²(.37m²) accumulation area
<ul style="list-style-type: none"> • 21SC - 21.5"(546mm) cut 5.5ft²(.51m²) accumulation area 	<hr/>
<ul style="list-style-type: none"> • 22C - 22"(559mm) cut 4.8ft²(.45m²) accumulation area 	<ul style="list-style-type: none"> • 22B - 22"(559mm) cut 4.8ft²(.45m²) accumulation area
<ul style="list-style-type: none"> • 24C - 24"(610mm) cut 5.8ft²(.54m²) accumulation area 	<ul style="list-style-type: none"> • 24B - 24"(610mm) cut 5.8ft²(.54m²) accumulation area
<hr/>	<ul style="list-style-type: none"> • 26B - 26"(660mm) cut 6.1ft²(.57m²) accumulation area
<hr/>	<ul style="list-style-type: none"> • 28B - 28"(711mm) cut 6.4ft²(.59m²) accumulation area

Additional features of both the C-Series & B-Series high-speed saw heads:

- **Sizes range** from 18"-28"(457mm-711mm) & weigh 4800lbs - 9000lbs+(2177kg-4082kg) - An average of 2000lbs(907kg) less than competitors on large models
- **Improved air-flow** and chip discharge through an exhaust chute in base
- **Control heavy underbrush** with dual chip discharge option
- **Maximum performance** for all carriers with professionally designed boom adapters

C-Series

Features



C-SERIES - FOR EASE OF ACCUMULATION
WITH A "FOUR ARMS-UP" DESIGN

CP-SERIES - DESIGNED FOR RUBBER TIRE APPLICATIONS

Better leverage when handling tall timber with extended tower

Faster accumulation - 1 cylinder per set of arms with a heavy duty timing bar


Stronger, more durable cast arms contoured for maximum support when accumulating

2 cylinders per head,
3.5"(89mm) or
4"(102mm)

Ultra-reliable disc drive, easily adjustable bearings

Quad Tooth® style options in Beaver, Concave, or Carbide

QUADCO disc options one-piece or segmented discs

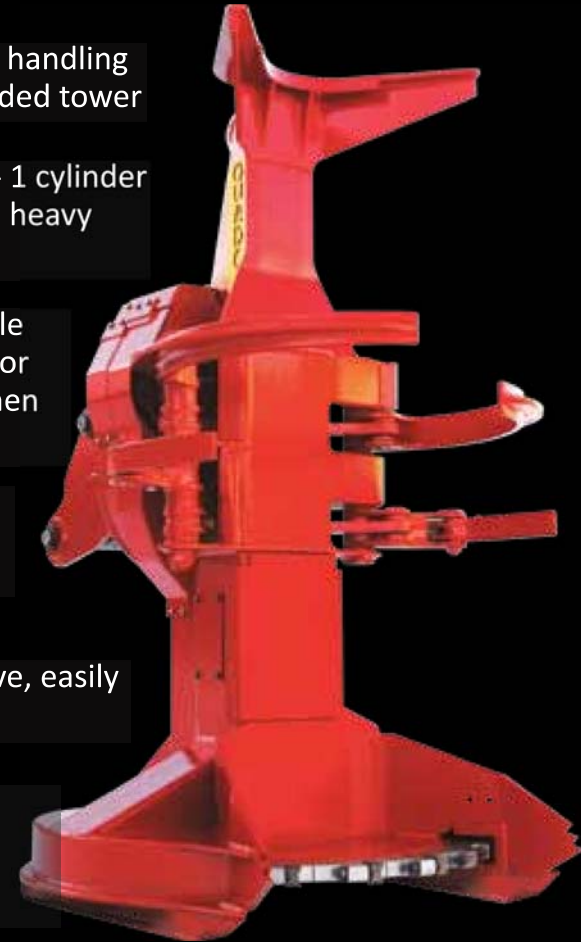

Specifications*

C-Series

MODEL	18C**	21SC**	22CP	22C	24CP	24C
Cutting Capacity	18"(457mm)	21.5"(546mm)	22"(559mm)	22"(559mm)	24"(610mm)	24"(610mm)
OPTIONAL ROTATION OPERATING WEIGHT (Includes std saw disc, boom adapter, and pins)						
Stationary	N/A	N/A	6,300lbs(2858kg)	N/A	6,450lbs(2926kg)	N/A
40-deg (Med Torque)	4,720lbs(2141kg)	N/A	N/A	N/A	N/A	N/A
40-deg (High Torque)	N/A	6,135lbs(2783kg)	N/A	6,485lbs(2942kg)	N/A	6,710lbs(3044kg)
360-deg (Med Torque)	4,990lbs(2263kg)	N/A	N/A	N/A	N/A	N/A
360-deg (High Torque)	N/A	6,600lbs(2994kg)	N/A	6,950lbs(3152kg)	N/A	7,175lbs(3255kg)
360-deg VI	N/A	N/A	N/A	7,160lbs(3248kg)	N/A	7,385lbs(3350kg)
DIMENSIONS						
Height	104"(2642mm)	116"(2946mm)	117"(2972mm)	117"(2972mm)	117"(2972mm)	117"(2972mm)
Width	59"(1499mm)	61.5"(1562mm)	70"(1778mm)	64"(1626mm)	70"(1778mm)	70"(1778mm)
Depth	51"(1295mm)	63.25"(1607mm)	73"(1854mm)	67"(1702mm)	73"(1854mm)	71"(1803mm)
Max Throat opening	30"(762mm)	46.5"(1181mm)	52"(1321mm)	51"(1295mm)	52"(1321mm)	52"(1321mm)
Throat opening at teeth	29"(737mm)	42"(1067mm)	42"(1067mm)	41"(1041mm)	43"(1092mm)	43"(1092mm)
Accumulation area	3.0 sq.ft.(.28m ²)	5.5 sq.ft(.51m ²)	5.1 sq.ft.(.47m ²)	4.8 sq.ft.(.45m ²)	5.8 sq.ft.(.54m ²)	5.8 sq.ft.(.54m ²)
DISC DATA (Can vary depending on the type of disc and choice of teeth)						
Tip-to-tip diameter	48"(1219mm)	54"(1372mm)	58"(1473mm)	57"(1448mm)	61"(1549mm)	61"(1549mm)
Rated saw speed	1,350rpm	1,200rpm	1,100rpm	1,150rpm	1,075rpm	1,075rpm
Number of teeth	18	22	16	16	18	18
Saw kerf	2"(51mm)	2"(51mm)	2 5/16"(59mm)	2 5/16"(59mm)	2 5/16"(59mm)	2 5/16"(59mm)
Weight - holders & teeth (varies depending on disc)	500-530lbs (227-240kg)	645lbs(293kg)	840lbs(381kg)	840lbs(381kg)	956lbs(434kg)	956lbs(434kg)
Style (One-piece & Segmented)	Both	Both	Both	Both	Both	Both

***Specifications are subject to change without notice. Weights & measurements are approximate.**

****Head specially designed for small timber where high accumulation capacity and fast cycles are required.**